

Vertical centrifugal pumps Typhoon

TY 6

- **Inlet connections:** 1" 1/2 F
- **Outlet connections:** 1" M
- **Max. Flow rate:** 6 m³/h
- **Max. Delivery head:** 8 mts
- **Max Viscosity:** 100 cps
- **Temperature PP:** -5°C +65°C
- **Temperature PVDF:** -20°C +90°C



PP



PVDF


SPECIFIC GRAVITY TABLE

L = 0,37 Kw	M = 0,55 Kw	H = 0,75 Kw
up to 1,2	up to 1,5	up to 1,9

MOTOR SPECIFICATION


SIZE	Kw	DESIGN
IEC 71	0,37	B5
IEC 71	0,55	B5
IEC 71	0,75	B5

PERFORMANCE

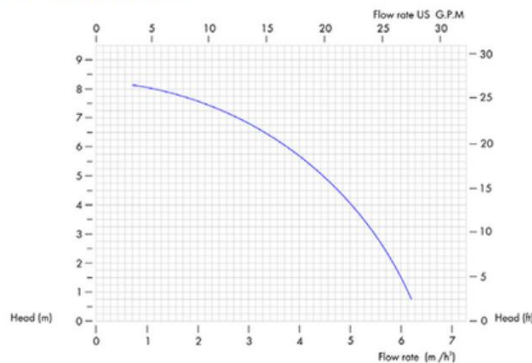

The curves and performance values refer to pumps with free delivery outlet with water at 20 °C, and two poles motor 50 Hz. These data may vary according to the construction materials and hydraulic conditions.

DIMENSIONS



A	B	C	D	E	F	G	H	I	M	N	O	P
*	147	20	80	340	130	128.5	81.5	260	290	130	210	Ø165

*Depend on the manufacturer

COMPOSITION

MODEL	CASING	O RING	LENGTH mm	CONNECTIONS	PUMP DESIGN	MOTOR VERSION
TY006	P = PP K = PVDF	D = EPDM V = VITON	250 500 800 1000	1 = BSP STD 2 = FLANGED	L = LOW DENSITY M = MEDIUM DENSITY H = HIGH DENSITY	IE = IEC FLANGE